

2012 SUMMIT X[®]



PACKAGE HIGHLIGHTS

- REV-XP™ platform
- SC™-5M rear suspension
- **NEW** Non-ported 2.5-inch PowderMax™ II track
- HPG™ Plus shocks
- Lightweight chromoly front suspension lower A-arm
- Pilot™ DS skis
- Brembo racing brake with stainless-steel braided brake line
- RER™ electronic reverse
- Dual air intakes
- Painted tunnel
- Multi-function digital gauge with display
- 285-mm / 12-inch windshield
- **NEW** REV-XP X Narrow seat with 1.3 gal (5 l) of storage
- **NEW** Wrap kit choices (decals)*
- **NEW** Aluminum tapered handlebar with XC control button

ENGINE CHOICE

Engine	Rotax® E-TEC® 800R
Engine details	Liquid-cooled, 3-D.R.A.V.E.™
Cylinders	2
Displacement	799.5 cc / 48.8 in ³
Bore	82 mm / 3.2 in
Stroke	75.7 mm / 3 in
Maximum engine speed	7900 RPM
Carburation	Electronic Direct Injection
Recommended fuel type	Premium unleaded
Minimum octane	91
Fuel tank	40 liters / 10.6 gallons
Oil tank capacity	3.7 liters / 3.9 quarts
Exhaust system	Single tuned-pipe, baffle muffler

POWERTRAIN

Drive clutch type	TRA™ VII
Driven clutch type	QRS
Engagement	3800 RPM
Small sprocket number of teeth	21 (146 in) 19 (154 in - 163 in)
Large sprocket number of teeth	49 (146 in - 154 in) 51 (163 in)
Drive sprocket number of teeth	8
Drive sprocket diameter	183 mm / 7.2 in
Brake system	Brembo racing brake with stainless-steel braided brake line

DRY WEIGHT

146 in	206 kg / 454 lb
154 in	208 kg / 459 lb
163 in	210 kg / 464 lb

FEATURES

Frame	REV-XP	Reverse	RER	Temperature gauge	Optional
Skis	Pilot DS	Heated throttle lever	Standard	Mirrors	Optional
Seating	REV-XP X narrow with storage	Heated grips	Standard	Windshield	285 mm / 12 in
Handlebar	Aluminum, tapered with J-hooks / Mountain strap	Speedometer	Standard	Carbide runner	Standard
Riser block height	130 mm / 5.1 in	Tachometer	Standard	Hitch	Optional
Electric start	Optional	Fuel gauge	Standard		

COLOR CHOICE

Deep Black
Black / White

DIMENSIONS

Vehicle overall length	3226 mm / 127 in (146 in) 3335 mm / 131.3 in (154 in) 3445 mm / 135.6 in (163 in)
Vehicle overall width	1081 to 1126 mm / 42.6 to 44.3 in
Vehicle overall height	1300 mm / 51.2 in
Ski stance	907 mm or 950 mm / 35.7 or 37.4 in
Ski overall length	1040 mm / 41 in
Ski width	165 mm / 6.5 in
Track nominal width	406 mm / 16 in
Track nominal length	3705 mm / 146 in 3923 mm / 154 in 4141 mm / 163 in
Track profile height	63.5 mm / 2.5 in PowderMax II

SUSPENSION

Front suspension	Dual A-arms
Front shock	HPG Plus
Front suspension max. travel	200 mm / 8 in
Rear suspension	SC-5M
Center shock	HPG Plus
Rear shock	HPG Plus
Rear suspension max. travel	356 mm / 14 in (146 in) 381 mm / 15 in (154 in) 406 mm / 16 in (163 in)



2012 SUMMIT X[®]



WRAP OPTIONS*

Take the promotion offer and customize your sleds with the look you want.




Drop Zone



ID



Tag Yellow

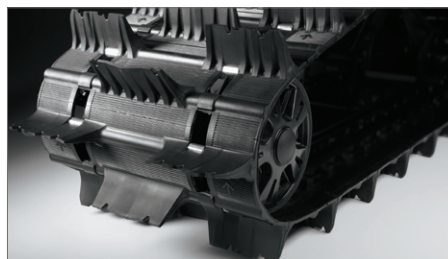

PowderMax II Track

Large, non-ported track with 2.5" lugs provide unmatched traction and flotation.



NEW Aluminum Tapered Handlebar with XC Control

Lighter weight, stronger, better ergonomics and trick look. Same setup as the Freeride sleds, with aluminum throttle block, single hand/throttle warmer intensity switch and RER button on the console.

*Wrap kit available for REV-XP Spring-Exclusive models as a Spring promotion choice.